

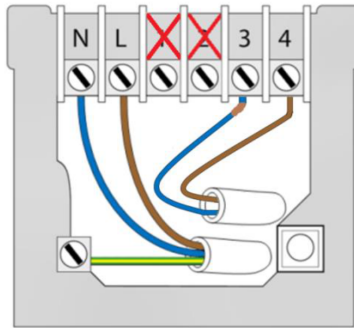



Dual Channel Receiver

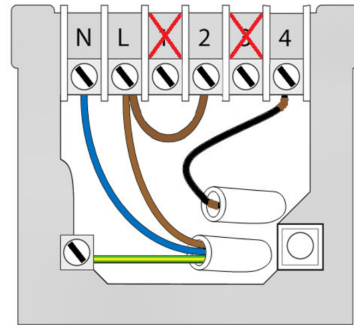



3: Underfloor ON
4: Radiators ON

Single Channel Receiver



2: Common
4: Hot Water ON

NOTE: The Receiver Units are mains powered and require either a separate 3A fused spur or connection directly into the boiler if the boiler is powered from a 3A fused spur.

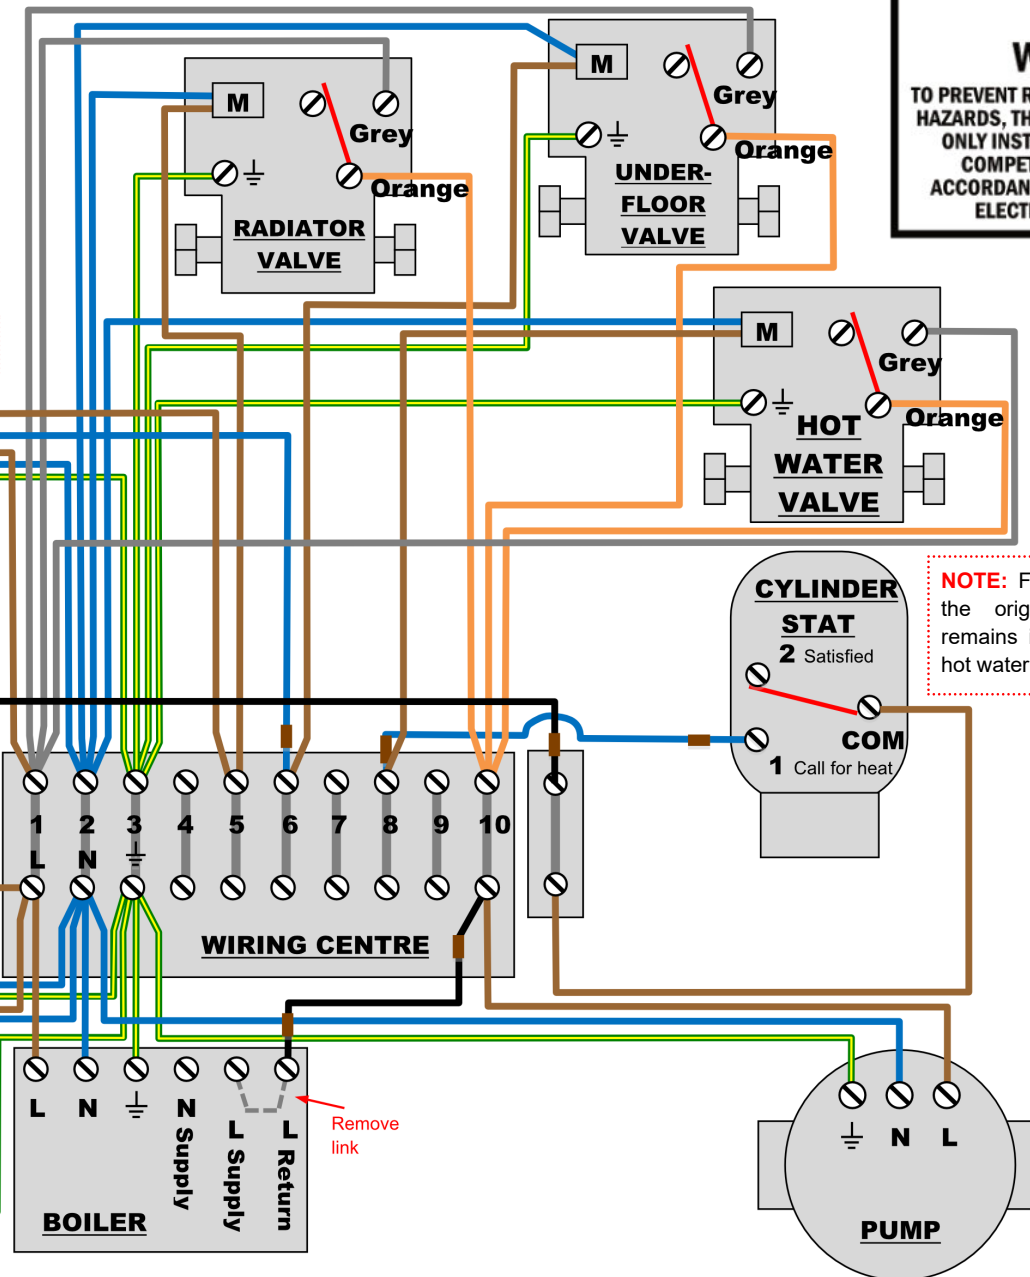

WARNING
TO PREVENT RISK OF DAMAGE OR SAFETY HAZARDS, THIS EQUIPMENT SHOULD BE ONLY INSTALLED BY QUALIFIED OR COMPETENT PERSONS AND IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL REGULATIONS

NOTE: For safety, it is mandatory that the original tank/cylinder thermostat remains in the circuit, left to maximum hot water temperature (65°C).

Maximum pump rating: 0.6A